

SPECIFICATIONS:

The medical gas outlet shall be an Amico **Alert-1** series.

Outlets shall be manufactured with an 6 - 1/2" [165 mm] length type "K" 1/2" [12.7 mm] outside diameter (3/8" nominal) size copper inlet pipe stub, which is silver brazed to the outlet body. Body shall be 1 - 5/16" [33 mm] diameter one piece brass construction. For positive pressure gas services, the outlet shall be equipped with a primary and secondary check valve and the secondary check valve shall be rated at a minimum 200 psi [1,379 kPa] in the event the primary check valve is removed for maintenance. Outlet bodies shall be gas specific by indexing each gas service to a gas specific dual pin indexing arrangement on the respective identification module.

A large bright color coded front plate shall be used for ease of gas identification and aesthetic appeal.

With the back rough-in mounted the outlet shall adjust up to 1" [25 mm] variation in wall thickness.

The latch-valve assembly shall be Ohmeda Diamond™ Quick Disconnect, Chemetron Quick Disconnect, Puritan-Bennett Quick Disconnect, or DISS depending on the type ordered.

All M.R.I. outlets are manufactured from nonferrous material.

All outlets shall be cleaned and degreased for medical gas service, factory assembled and tested.

All outlets are **UL** Listed and **CSA** approved.

Amico products comply with NFPA-99.



FEATURES:


- Flow rate exceeds the requirements of NFPA and CSA.
- Accepts quick connect gas specific adapters, or DISS Adapters depending on which front assembly is ordered.
- 100 % hydrostatic testing of each outlet and cleaned for medical gas service.
- Indexed to eliminate interchangeability of gas services.
- Up to 1" [25 mm] wall thickness adjustment.
- Universal rough-in assembly to accept Quick Connects or DISS front adapters. (Can be interchanged at any time).
- Outlets are also available for M.R.I. use.

PROJECT:



DIMENSIONS

Note: DISS shown.

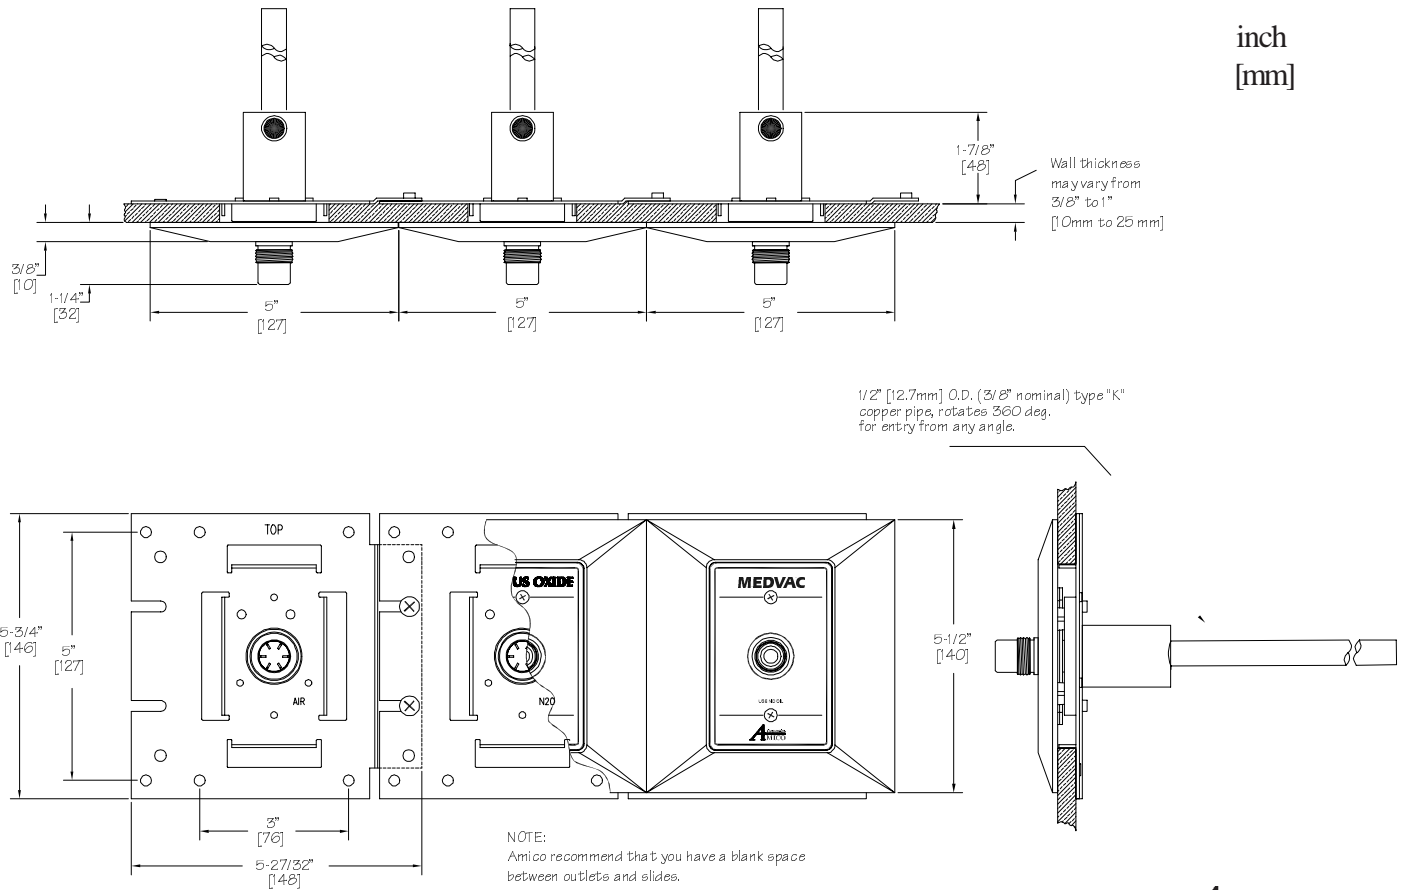

NOTE:
Amico recommend that you have a blank space between outlets and slides. Maximum 3 outlets may be ganged together without additional support.

A Series
ALERT-1

- DIS = DISS
- QD = OHMEDA compatible
- CH = CHEMETRON compatible
- PB = PURITAN-BENNETT compatible

O-DISCEI-E-XXX

- U = English (NFPA) Oxy, Air, Vac and WAG only.
- E = English (CSA)
- F = French (CSA)
- S = Spanish (NFPA) Oxy, Air, Vac and WAG only.

Example:
English NFPA - DISS, Oxygen = O-DISCEI-U-OXY

MODEL NUMBERS

The XXX defines the Gas:

- | | | |
|----------------------------------|---|------------|
| Oxygen | = | OXY |
| Medical Air | = | AIR |
| Nitrous Oxide | = | N2O |
| *Nitrogen | = | NIT |
| **Carbon Dioxide | = | CO2 |
| Carbogen | = | CAR |
| MedVac | = | VAC |
| Waste Anesthetic Gas Disposal | = | WAG (NFPA) |
| Anesthetic Gas Scavenging System | = | AGS (CSA) |

* = Available only in DISS

** = Available only in DISS and Ohmeda

DISTRIBUTED BY: